

Specifications ThunderION IQ 2.0	
Available effective length	250mm to 4375mm
Calculation	Eff.L. (n x 125)
Overall length	= Eff.L. + 195
(n = variable, number of distance between high voltage points)	



**Manager IQ Easy**  
P/N: 1030000000 - 24 V DC powered  
P/N: 1030000010 - 100-240 V AC powered



**Extension IQ Easy**  
P/N: 1030000100 - 24 V DC powered  
P/N: 1030000110 - 100-240 V AC powered

Cordset M12, female straight  
5 m P/N: 7519020365  
10 m P/N: 7519020366  
10 m P/N: 7519020380 (cable chain, shielded)

Cordset M12, female angled  
5 m P/N: 7519020375  
10 m P/N: 7519020376

Connector M12, female straight  
(screw connections)  
P/N: 7519020350 (ø4-6 mm cables)  
P/N: 7519020351 (ø6-8 mm cables)

Connector M12, female angled  
(screw connections)  
P/N: 7519020355 (ø4-6 mm cables)  
P/N: 7519020356 (ø6-8 mm cables)



Connector M12, straight male  
(screw connections)  
P/N: 7519020352 - (ø4-6 mm cables)  
P/N: 7519020353 - (ø6-8 mm cables)



Cordset M12 female-M12 male  
straight connectors  
7519020390 - 2 m, unshielded  
7519020391 - 5 m, unshielded  
7519020392 - 10 m, unshielded  
7519020386 - 5 m, cable chain, unshielded  
7519020387 - 10 m, cable chain, unshielded  
7519020383 - 5 m, cable chain, shielded  
7519020384 - 10 m, cable chain, shielded

**IQ Easy platform**


**\* Emitter**



Emitter screw  
P/N: 4509001035  
(ThunderION serial number:  
from 14450244)



Emitter, pull  
P/N: 4509001030  
(ThunderION serial number:  
13470001 to 14450243)

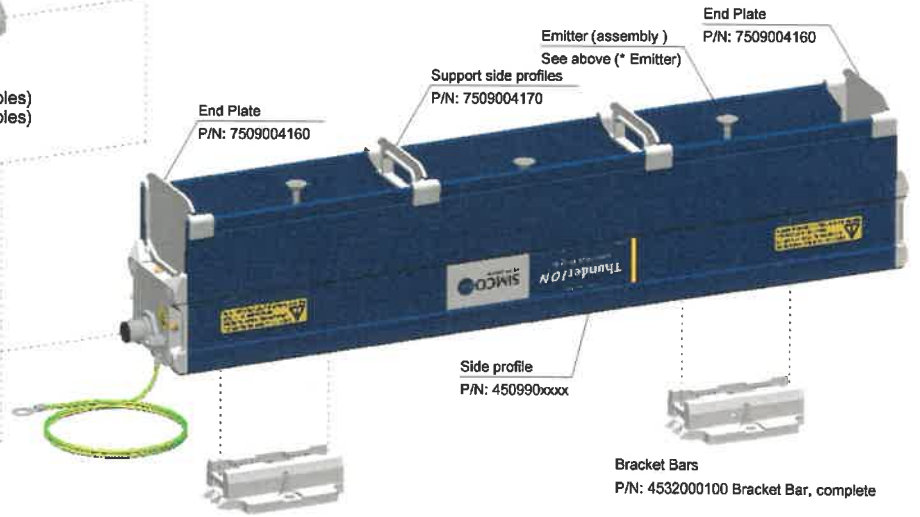

End Plate  
P/N: 7509004160

Support side profiles  
P/N: 7509004170

End Plate  
P/N: 7509004160

Emitter (assembly)  
See above (\* Emitter)

Side profile  
P/N: 450900xxxx

Bracket Bars  
P/N: 4532000100 Bracket Bar, complete

**Protection cover**



Protection plug  
P/N: 9290090060  
(ThunderION serial number:  
from 14450244)



Cap flex, silicone  
P/N: 9240910520  
(ThunderION serial number:  
13470001 to 14450243)